

Model 9210A MI-Type Standard


*Replaces Thomas-Type One-Ohm
Low Temperature Coefficient
Improved Stability - Oil Type
New Industry Standard*

General Description:

The Model 9210A MI-Type standard has been developed through years of research by NRCC and Measurements International and is now offered as an improved resistor design to replace the L&N Thomas-Type One-Ohm Standard as well as other values. These improvements have been achieved through a new annealing process of the element and changes in the structural mounting. Historical data is now proving the Model 9210A to be the most stable oil filled resistor commercially available.

The Model 9210A features a long term drift rate less than 0.2 ppm per year and a temperature coefficient of less than 0.05 ppm/°C.

Model 9210A

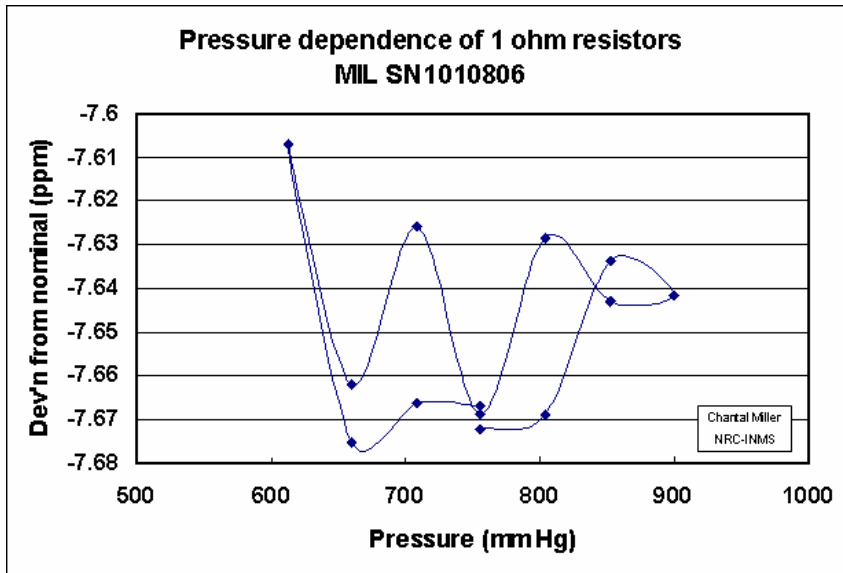

Specifications:

Model 9210A

Temperature Coefficient	<0.05 PPM/°C
Nominal Value	<10 PPM
Long Term Drift	<0.2 PPM/year
Maximum Power	0.1 Watt
Operating Environment	20°C to 30°C in oil
Storage Environment	0° to 40°C, 10 to 80% RH, non-condensing
Dimensions	Height: 165 mm, Diameter: 90 mm
Weight	2 kg
Shipping Weight	5 kg
Warranty	1 Year Parts & Labor

Accessories:
Carrying Case

Operating Power:
NA

Distributed By:

How to Order:

Model: 9210A/0R1 - MI-Type Tenth-Ohm Standard
9210A/1R - MI-Type One-Ohm Standard

Data Subject to Change

Printed in Canada



Measurements International

118 Commerce Dr., PO Box 2359, Prescott, Canada K0E 1T0
Ph. 613.925.5934 • Fx. 613.925.1195 • North America: 1.800.324.4988